


TWISTLOC
Quick release system
(Max. pressure 20.0 bar)



Diaphragm check valve to fit dry booms

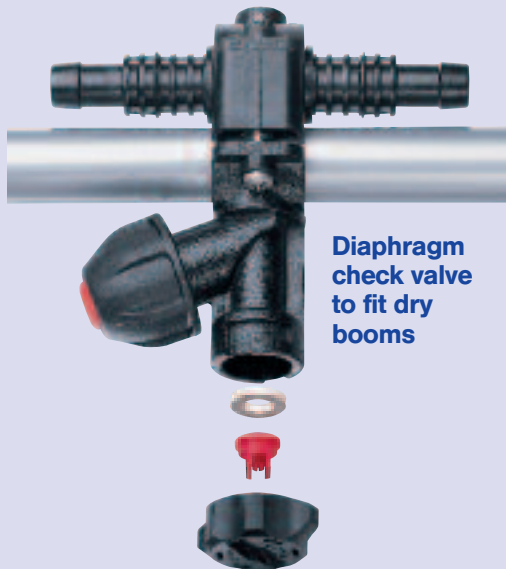

Diaphragm check valve to fit wet booms



Diaphragm check valve with eyelet connector
 for 3/4" pipes
065.272.56.KL
 for 1/2" pipes
065.272.56.KH



Diaphragm check valve for threaded connection
 M 18 x 1.5
065.272.56.HB



Single-hose connector
 for 3/4" boom tubings
 (25-28 mm O.D.)
065.274.56.KL
 for 1/2" boom tubings
 (20-22 mm O.D.)
065.274.56.KH



Two-hose connector
 for 3/4" boom tubings
 (25-28 mm O.D.)
065.275.56.KL
 for 1/2" boom tubings
 (20-22 mm O.D.)
065.275.56.KH

Strainer (with integrated seal)
 60 M
065.268.7J
 25 M
065.269.7J



Eyelet connector
 for 1" pipes
090.023.51.KA
 for 3/4" pipes
090.013.51.KA
 for 1/2" pipes
090.003.51.KA



Ball check valve
 60 mesh
065.265.56.00
 25 mesh
065.266.56.00

Bayonet cap
 (range: cf. page 53)



Gasket
065.242.73