

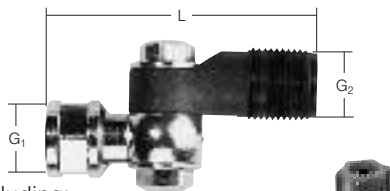

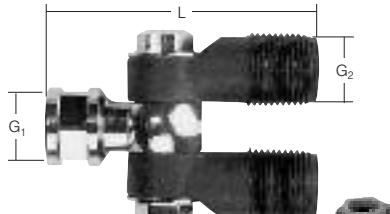




Eyelet connectors
Ball joint thread connectors
Swivel nozzle holders
Diaphragm nozzle holder for air assisted sprayer

Eyelet connectors*	for pipe-Ø	Male thread G	L mm	B mm	Material	Order no.
Split eyelet connector , max. 10 bar, with stainless-steel screw 	3/8"	G 3/8"	49	41	Polyamide	090.053.51
	1/2"	G 3/8"	53	45	Polyamide	090.003.51
	3/4"	G 3/8"	57	51	Polyamide	090.013.51
	1"	G 3/8"	65	61	Polyamide	090.023.51

Ball joint thread connector, swivel nozzle holder*	G ₁	G ₂ mm	L	Material	Order no.
Ball joint thread connector , max. 25 bar, full-swiveltype max. 30° 	3/8" female	3/8" male	56	Brass	092.022.30 AF
	1/2" female	1/2" male	71	Brass	092.040.30 AH
	3/4" female	3/4" male	80	Brass	092.050.30 AL
Single swivel nozzle holder , max. 20 bar  including: threaded cap gasket 	1/4" male	3/8" male	35	Polyamide	095.016.56.07.22
	NPT 1/4" female	NPT 3/8" male	35	Polyamide	095.016.56.07.21
		3/8"		POM Rubber	065.200.56 065.240.73.00
Double swivel nozzle holder , max. 20 bar  including: threaded cap gasket 	NPT 1/4" female	3/8" male	35	Polyamide	095.016.56.07.20
		3/8"		POM Rubber	065.200.56 065.240.73.00

* For combination with ball valves 065.26X.XX and threaded caps 065.200.XX

Diaphragm Nozzle Holder	Description	Order no.
	Diaphragm nozzle holder incl. 2 threaded caps opening pressure: 1.1 bar closing pressure: 0.9 bar max. working pressure: 40 bar 1/4" male 1/4" female	095.016.30.09.61.0 095.016.30.09.62.0