


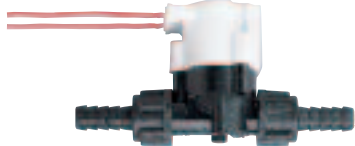


Hose connectors

Schlauchanschlüsse	Threads	Max. pressure bar	Hose-Ø D mm	Material	Order no.
Hose shank to match threaded cap 065.200.XX. or round-hole TWISTLOC cap 065.202.56.11, or MULTIJET A.402.904.10 		10.0	12	PP	095.016.56.07.49
Hose shank connector male 	G 3/8" male	25.0	11	Brass	095.016.30.07.67
	G 1/2" male	25.0	11	Brass	095.016.30.07.68
	NPT 1/4" male	10.0	6	PP	HB02590*
	NPT 1/4" male	10.0	10	PP	HB025038
	NPT 3/8" male	10.0	13	PP	HB038050
	NPT 1/2" male	10.0	13	PP	HB050
	NPT 3/4" male	10.0	19	PP	HB075
	NPT 3/4" male	10.0	25	PP	HB075100
	NPT 1" male	10.0	25	PP	HB100
	NPT 1" male	10.0	32	PP	HB100125
	NPT 1 1/4" male	10.0	30	PP	HB125
	NPT 1 1/4" male	10.0	25	PP	HB125100
	NPT 1 1/2" male	10.0	37	PP	HB150
	NPT 2" male	10.0	36	PP	HB200150
	NPT 2" male	10.0	49	PP	HB200
G 2" male	6.0	60	PVC	095.016.50.05.73	
NPT 3" male	10.0	75	PP	HB300	
Hose shank connector female 	G 1/2" female	25.0	11	Brass	095.016.30.06.41
	G 1/2" female	25.0	13	Brass	095.016.30.06.42
	G 1 1/4" female	10.0	30	PP	095.016.53.07.47
	G 1 1/2" female	10.0	40	PP	095.016.53.07.48
	G 2" female	6.0	50	PP	A.100.750

* 90° elbow

Solenoid valve	Description	Max. pressure	Order no.
	Solenoid valve to fit dry booms Hose-Ø 11 mm Hose-Ø 13 mm Diaphragm: MBR (Buna)	10.0 10.0	Z-Endventil 11 00 Z-Endventil 00 00